

SiHF silicone rubber cable

Technical Parameters:


Temperature Range:-60°C ~ +180°C

Rated voltage:300 / 500Vac

Conductor:tinned copper

Insulation:halogen-free,flame-retardant
silicone rubber

Standard:DIN EN 50525-2-83

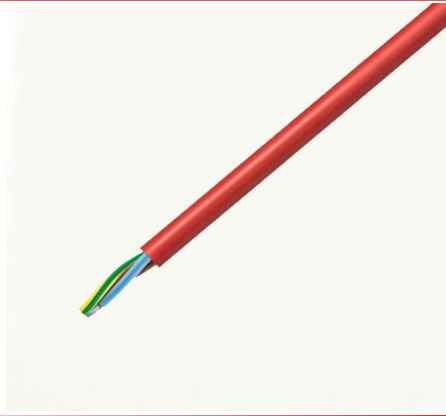

Use:Used for steel,ceramic and iron works ; bakery equipment and industrial furnaces ;
electric motor industry ; solarium construction ; thermal and heating elements ; lighting technology

Color:red,orange,redbrown,or other colors upon request.

Article number	No. cores x cross-sec. (mm ²)	Outer Diameter (mm)	Copper Index (kg/km)	Weight (kg/km)
06001	2×0.5	5.6	9.6	42.0
06002	3G0.5	5.9	14.5	44.0
06003	3×0.5	5.9	14.5	44.0
06004	4G0.5	6.5	19.3	58.0
06005	4×0.5	6.5	19.3	58.0
06006	5G0.5	7.3	24.0	62.0
06007	5×0.5	7.3	24.0	62.0
06008	2×0.75	6.4	14.4	53.0
06009	3G0.75	6.8	21.6	63.0
06010	3×0.75	6.8	21.6	63.0
06011	4G0.75	7.6	29.0	83.0
06012	4×0.75	7.6	29.0	83.0
06013	5G0.75	8.5	36.0	101.0
06014	5×0.75	8.5	36.0	101.0
06015	2×1	6.6	19.0	59.0
06016	3G1	7.0	29.0	77.0
06017	3×1	7.0	29.0	77.0
06018	4G1	7.9	38.0	94.0

We can offer customised services according to your requirements.

Jiangsu XingYuan High Temperature Wire & Cable Co.,Ltd

www.xingyuancable.com Mobile/WhatsApp/WeChat:+86 18361138773 Email:xyccable@foxmail.com